





Transformer

TR100VA005


Transformer 100 VA, 480/277/240/120 to 24 Vac, Circuit Breaker, Foot and Single Threaded Hub Mount



PRIMARY WIRES





SECONDARY WIRES



*Secondary Yel/Wht wire in phase with Primary Blk wire.

Mounting Hole = .350" x .175"

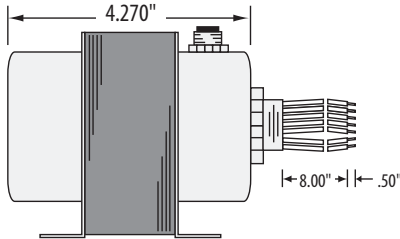

SPECIFICATIONS

- VA Rating: 100
- Frequency: 50/60 Hz
- Mounting: Foot & Single Threaded Hub
- Over Current Protection: Circuit Breaker
- Dimensions: 3.060" x 2.500" x 4.270"
(w/ .500" NPT Hub)
- Wire Length: 8" Typical w/ .5" Strip
- Operating Temperature: -30 to 140° F
- MTBF: 100,000 Hours @ 77° F
- Construction: Split-Bobbin
- Weight: 4.74 lbs.
- Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

Notes